

  
**ICOM**

VHF AND UHF TRANSCEIVERS

**IC-F12**

(VHF transceiver, 16 channel type)

**IC-F12S**

(VHF transceiver, 2 channel type)

**IC-F22**

(UHF transceiver, 16 channel type)

**IC-F22S**

(UHF transceiver, 2 channel type)

Meets  
**MIL-STD 810**



▲ 2 channel type

- Simple operation with minimum switches
- Built-in 5-tone, CTCSS, DTCS encode/decode plus DTMF encode
- MIL specification rugged construction
- 16 position rotary channel type or 2 position toggle channel type
- Powerful 5W of VHF and 4W of UHF output power
- Selectable 12.5kHz or 25kHz channel spacing
- Optional Ni-MH battery pack or alkaline battery case available
- Wide range of accessories available

*Simple but  
effective for  
your Business*

◀ 16 channel type



Icom Inc.

**SPECIFICATIONS**

**GENERAL**

- Frequency coverage : IC-F12/S 146–174MHz  
IC-F22/S 440–470MHz
- Channel spacing : 25kHz and 12.5kHz
- PLL channel step : IC-F12/S 2.5kHz or 3.125kHz  
IC-F22/S 5kHz or 6.25kHz
- Power supply requirement : 7.2V DC (negative ground)
- Current drain (approx.) : Tx High (IC-F12/S: 5W) 1.6A  
(IC-F22/S: 4W) 1.6A  
Rx Rated audio 250mA  
Standby 70mA
- Frequency error : ±2.0kHz (wide)  
±1.5kHz (narrow)
- Operating temperature range : -25°C to +55°C
- Dimensions (proj. not included) : 54(W)×128(H)×37(D)mm
- Weight (with BP-209) : 310g

**TRANSMITTER**

- Output power (at 7.2V DC) : IC-F12/S 5W, 2W or 1W  
IC-F22/S 4W, 2W or 1W
- Max. frequency deviation : ±5.0kHz (wide)  
±2.5kHz (narrow)
- Spurious emissions : 0.25µW (below 1GHz)
- Adjacent channel power : 70dB (wide)  
60dB (narrow)
- External mic. connector : 3-conductor 2.5(d)mm /2.2kΩ

**RECEIVER**

- Sensitivity (at 20dB SINAD) : 0.63µV typ. emf
- Squelch sensitivity : 0.3µV typ. (threshold)
- Adjacent channel selectivity : 70dB (wide)  
60dB (narrow)
- Spurious response rejection : 70dB

- Intermodulation rejection : 65dB
- Audio output power : 500mW typ. (at 5% distortion with an 8Ω load)
- External speaker connector : 2-conductor 3.5(d)mm /8Ω

**Supplied accessories:**

- Battery pack; BP-209 • Belt clip; MB-68 • Antenna

The IC-F12/S and IC-F22/S meet MIL-STD requirements and strict environmental standards for shock (MIL 810C, D, E) and vibration (MIL 810C, D, E).

Measurements made in accordance with ETS 300 086. All stated specifications are subject to change without notice or obligation.

**OPTIONS**

**BATTERY PACKS AND CASE**



BATTERY PACKS AND CASE	BP-208	BP-209	BP-210	BP-222
OUTPUT POWER	1W typ.	5/4W typ.	5/4W typ.	5/4W typ.
BATTERY LIFE	-	8.5hours	13hours	4.5hours

Battery life is approx. time; (Tx (Hi): Rx: standby=5:5:90)

**REGULAR CHARGER**



**BC-146 DESKTOP CHARGER + BC-147A/E AC ADAPTER**  
Charges the battery pack, BP-209, BP-210 or BP-222 with/without transceiver in 12, 18.5, 6.5 hours (approx.), respectively. The BC-147 AC ADAPTER is additionally required.

**RAPID CHARGERS**




**BC-144 DESKTOP CHARGER + BC-145A/E/V AC ADAPTER**  
For rapid charging of battery pack, BP-209, BP-210 or BP-222. An AC adapter, BC-145, is supplied with the charger depending on version. Charging time: 1.5 to 2 hours. BC-119 is also available for rapid charging.  
**BC-121 MULTI-CHARGER + AD-94 (#11) DESKTOP CHARGER ADAPTER + BC-124 AC ADAPTER**  
For rapid charging of up to 6 battery packs (Six AD-94s are required), BP-209, BP-210 or BP-222. An AC adapter, BC-124, may be supplied, depending on version. Charging time: 1.5 to 2 hours.

**SPEAKER-MICROPHONES**



HM-46L: Slim dimensions. Equipped with an earphone jack and a transmit indicator.  
HM-75A: Allows you to remotely select operating channel, etc., according to cloning.  
HM-131L: Compact and durable body. Equipped with an earphone jack and a revolving clip.

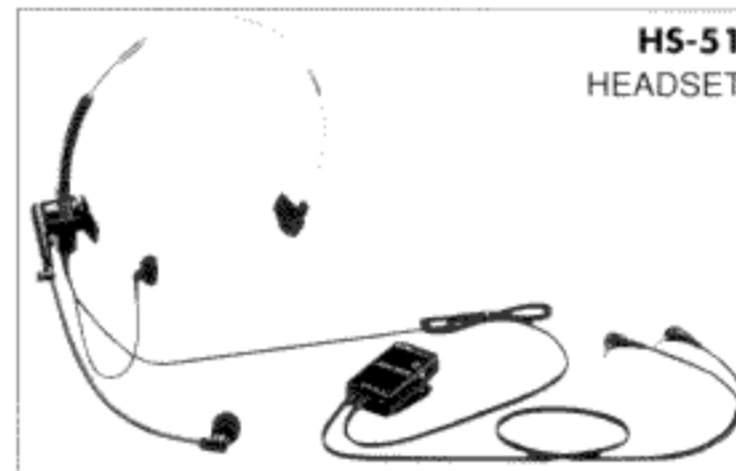


For hands-free operation. Includes VOX, PTT and "one-touch" PTT with a time-out timer.



The light weight earphone-mic. has a compact microphone with PTT switch that clips to your lapel.



Provides clear audio in noisy environments.

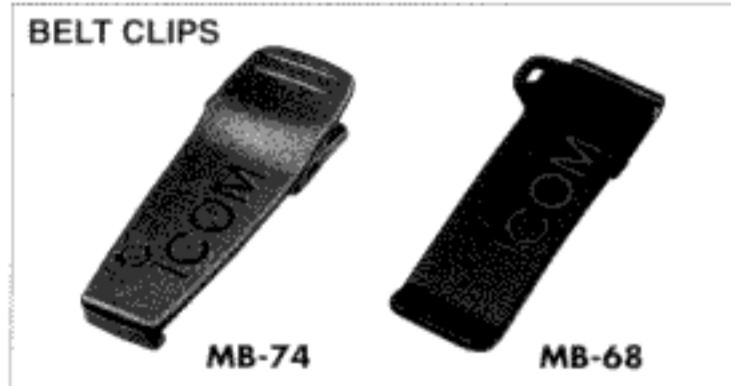

MB-74: Alligator type. Clips to almost anything in a variety of convenient places.  
MB-68: Same as that supplied.



Allows you to connect a BNC-type antenna. (For maintenance use only)



	Freq. range	Length	Ring Color
FA-SC56VS	146–162MHz	80mm	Red
FA-SC57VS	160–174MHz	80mm	Green
FA-SC73US	450–490MHz	60mm	Red

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

**Icom America Inc.**

<Corporate Headquarters>  
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.  
Phone: (425) 454-8155 Fax: (425) 454-1509  
URL: <http://www.icomamerica.com>  
<Customer Service> Phone: (425) 454-7619

**Icom Canada**

Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone: (604) 952-4266 Fax: (604) 952-0090  
URL: <http://www.icomcanada.com>

**Icom (Australia) Pty. Ltd.**

A.B.N. 88 006 092 575  
290-294 Albert Street, Brunswick, Victoria, 3056, Australia  
Phone: 03 9387 0666 Fax: 03 9387 0022  
URL: <http://www.icom.net.au>

**Icom New Zealand**

146A Harris Road, East Tamaki, Auckland, New Zealand  
Phone: 09 274 4062 Fax: 09 274 4708  
URL: <http://www.icom.co.nz>

**Icom (Europe) GmbH**

Communication Equipment  
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany  
Phone: 0211 346047 Fax: 0211 333839  
URL: <http://www.icomeurope.com>

**Icom Spain S.L.**

Ctra. de Gracia a Manresa Km. 14,750  
08190 Sant Cugat del Valles Barcelona, SPAIN  
Phone: (93) 590 26 70 Fax: (93) 589 04 46  
URL: <http://www.icomspain.com>

**Icom (UK) Ltd.**

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.  
Phone: 01227 741741 Fax: 01227 741742  
URL: <http://www.icomuk.co.uk>

**Icom France S.a**

Zac de la Plaine, Rue Brindejone des Moulinais  
BP 5804, 31505 Toulouse Cedex, France  
Phone: 561 36 03 03 Fax: 561 36 03 00  
URL: <http://www.icom-france.com>

**Asia Icom Inc.**

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone: (02) 2559 1899 Fax: (02) 2559 1874

Your local distributor/dealer:

DIKMANS TELECOM SERVICE B.V.  
Rivierdijk 751  
3371 EK HARDINXVELD-GIESSENDAM

Telefoon : +31(0)184-630111  
Telefax : +31(0)184-630022  
E-mail : [info@dikmans.nl](mailto:info@dikmans.nl)  
Website : [www.dikmans.nl](http://www.dikmans.nl)



Certificate Number Q14190

Icom Inc. (Japan), is an ISO9001 certification acquired company.