



LPD FM TRANSCEIVER

# IC-4088E

## *Simplicity, Quality and Reliability You Can Count on!*

- 69 channels and 38 group codes
- Diversified range of use from family recreation to light commercial use
- External DC power jack for charging
- High-performance antenna allows for greater communication reliability
- Enhanced conversation privacy with built-in voice scrambler
- Economical 3 alkaline cells can be used, with an ultra long 65 hours use possible
- 'Smart-ring' and 'Call-ring', plus Time-out-timer function
- Splash resistant construction for outdoor use



Icom Inc.

## SPECIFICATIONS

- Number of channels : 69 (simplex; 433.075–434.775MHz)
- Mode : FM (F3E)
- Frequency stability : ±2.5kHz, ±5.7ppm
- Frequency resolution : 25kHz
- Battery requirements : 3 × AA (R6) alkaline cells ; or optional BP-202
- External power supply : 6.0V DC ±5% (with BC-149D, CP-18E)
- Current drain (at 4.5V DC) : Less than 140mA
- Operating Temp. range : -10°C to +55°C
- Number of CTCSS freq. : 38 (67.0–250.3Hz)
- Weight : 200g (includes 3 alkaline cells)
- Output power : 10mW
- External MIC connector : 3-conductor 2.5 (d) mm/ 2.2kΩ
- Sensitivity (12dB SINAD) : Less than 0.2µV; -14dBµV
- Audio output power : More than 100mW at 10% distortion with an 8Ω load
- External SP connector : 3-conductor 3.5 (d) mm/ 8Ω

• Battery life (Tx:Rx:Standby=1:1:8) :

Battery type	Battery life
3 alkaline cells	approx. 65 hrs.
Optional BP-202	approx. 20 hrs.

• Communication range\* : Up to 2km (approx.) (Wide, open space)


\* Communication range may differ depending on weather conditions, etc.

### Applicable U.S. Military Specifications

Icom makes rugged products that meet MIL-STD requirements and strict environmental standards as follows.

Standard	MIL 810 C		MIL 810 D		MIL 810 E		MIL 810 F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
Low Pressure	500.1	I	500.2	I, II	500.3	I, II	500.4	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4-3	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation	505.1	I, II	505.2	I, II	505.3	I, II	505.4	I
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, III
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	—
Dust	510.1	I	510.2	I	510.3	I	510.4	I
Vibration	514.2	VIII, X	514.3	I	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV

## DIMENSIONS

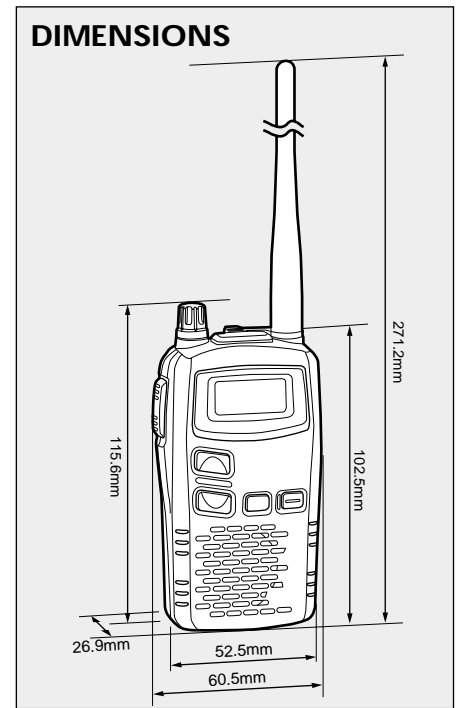

All stated specifications are subject to change without notice or obligation.

\* Simple licence is required in some countries. Voice scrambler not available in some countries.

## OPTIONS



Install into the battery cell space in the transceiver.  
3.6V/700mAh



6V DC, 1A output AC adapter. Charges the BP-202, while operating the radio.



6V DC, 2A output from 12V cigarette lighter socket with internal DC-DC converter.



Rapidly charges installed Ni-Cd battery cell assembly, BP-202. The charger adapter and the AC adapter supplied with the BC-119N depending on version. Charging time: 75 to 85 min.



**HM-46** : Compact and lightweight. Equipped with an earphone jack.  
**HM-75A** : Allows you to remotely select operating channels, etc.  
**HM-131** : Durable body. Equipped with an earphone jack and revolving clip.  
**HM-128** : Light weight and compact earphone-microphone with PTT switch that clips to your lapel.



**HS-85** : For hands-free operation. Includes VOX, PTT and "one-touch" PTT with a time-out timer.  
**VS-1** : PTT/VOX unit. Required when using the HS-94, HS-95 and HS-97 with the transceiver.  
**HS-94** : Earhook headset with flexible boom microphone.  
**HS-95** : Behind-the-head headset with flexible boom microphone.  
**HS-97** : Throat microphone fits around your neck and picks up speech vibration.

Icom Inc. 1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

URL: <http://www.icom.co.jp/world/index.html>

Count on us!

**Icom America Inc.**  
<Corporate Headquarters>  
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.  
Phone: +1 (425) 454-8155 Fax: +1 (425) 454-1509  
URL : <http://www.icomamerica.com>  
<Customer Service> Phone : (425) 454-7619

**Icom (Europe) GmbH**  
Communication Equipment  
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany  
Phone: +49 (0211) 346047 Fax: +49 (0211) 333639  
URL : <http://www.icomeurope.com>

**Asia Icom Inc.**  
6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.  
Phone: +886 (02) 2559 1899 Fax: +886 (02) 2559 1874  
URL : <http://www.asia-icom.com>

Your local distributor/dealer:

**Icom Canada**  
Glenwood Centre #150-6165 Highway 17,  
Delta, B.C., V4K 5B8, Canada  
Phone: +1 (604) 952-4266 Fax: +1 (604) 952-0090  
URL : <http://www.icomcanada.com>

**Icom Spain S.L.**  
Ctra. de Gracia a Manresa Km. 14,750  
08190 Sant Cugat del Valles Barcelona, SPAIN  
Phone: +34 (93) 590 26 70 Fax: +34 (93) 589 04 46  
URL : <http://www.icomspain.com>

**Beijing Icom Ltd.**  
1305, Wanshang Plaza, Shijingshan Road, Beijing, China  
Phone: +86 (010) 6866 6337 Fax: +86 (010) 6866 3553  
URL : <http://www.bjicom.com>

**Icom (Australia) Pty. Ltd.**  
A.B.N. 88 006 092 575  
290-294 Albert Street, Brunswick, Victoria, 3056, Australia  
Phone: +61 (03) 9387 0666 Fax: +61 (03) 9387 0022  
URL : <http://www.icom.net.au>

**Icom (UK) Ltd.**  
Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.  
Phone: +44 (01227) 741741 Fax: +44 (01227) 741742  
URL : <http://www.icomuk.co.uk>



Certificate Number Q14190  
Icom Inc. (Japan), is an ISO9001 certification acquired company.

**Icom New Zealand**  
146A Harris Road, East Tamaki, Auckland, New Zealand  
Phone: +64 (09) 274 4062 Fax: +64 (09) 274 4708  
URL : <http://www.icom.co.nz>

**Icom France S.a**  
Zac de la Plaine, 1, Rue Brindejonc des Moulinais  
BP 5804, 31505 Toulouse Cedex, France  
Phone: +33 (5) 61 36 03 03 Fax: +33 (5) 61 36 03 00  
URL : <http://www.icom-france.com>